



RIGHT ANGLE P.C. MOUNT D-SUB (MALE)



.318"/8.1mm footprint

- 30-410-0 9-position
 - 30-411-0 15-position
 - 30-412-0 25-position
 - 30-413-0 37-position
- Use -1 for Display Package

Size	A	B	C
9-pos	16.92	25.00	30.8
15-pos	25.25	33.30	39.2
25-pos	38.96	47.10	53.1
37-pos	55.42	63.50	69.4

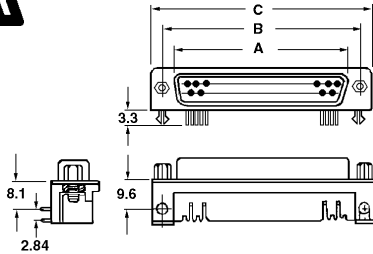


HIGH DENSITY R/A P.C. MOUNT D-SUBS (FEMALE)




- 30-860-0 15-position
 - 30-861-0 26-position
- Use -1 for Display Package

Size	A	B	C	D
15-pos	16.30	12.5	25.00	30.8
26-pos	24.60	12.5	33.30	39.2

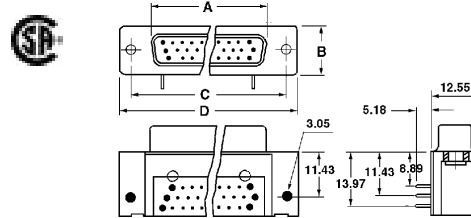


RIGHT ANGLE P.C. MOUNT D-SUB (FEMALE)



.318"/8.1mm footprint

- 30-420-0 9-position
 - 30-421-0 15-position
 - 30-422-0 25-position
 - 30-423-0 37-position
- Use -1 for Display Package

Size	A	B	C
9-pos	16.30	25.00	30.8
15-pos	24.60	33.30	39.2
25-pos	38.30	47.10	53.1
37-pos	54.80	63.50	69.4

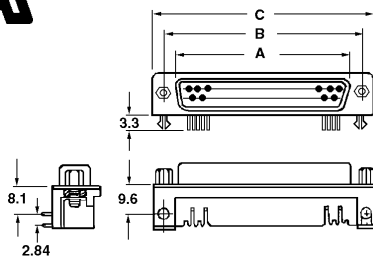

CENTRONICS CONNECTORS

CABLE PLUGS



- 30-902-0 36-position
 - 30-903-0 50-position
- Use -1 for Display Package

RIBBON CABLE PLUGS



- 30-942-0 36-position
 - 30-943-0 50-position
- Use -1 for Display Package

RIBBON CABLE RECEPTACLES




- 30-946-0 36-position
 - 30-947-0 50-position
- Use -1 for Display Package

RIBBON CABLE D-SUBS (MALE)



- 30-710-0 9-position
 - 30-711-0 15-position
 - 30-712-0 25-position
 - 30-713-0 37-position
- Use -1 for Display Package

Size	A	B	C
9-pos	16.92	25.00	30.8
15-pos	25.25	33.30	39.2
25-pos	38.96	47.10	53.1
37-pos	55.42	63.50	69.4




RIBBON CABLE D-SUBS (FEMALE)



- 30-720-0 9-position
 - 30-721-0 15-position
 - 30-722-0 25-position
 - 30-723-0 37-position
- Use -1 for Display Package

Size	A	B	C
9-pos	16.30	25.00	30.8
15-pos	24.60	33.30	39.2
25-pos	38.30	47.10	53.1
37-pos	54.80	63.50	69.4



RIBBON CABLE



- 08-1410-100 10-conductor
- 08-1414-100 14-conductor
- 08-1416-100 16-conductor
- 08-1420-100 20-conductor
- 08-1425-100 25-conductor
- 08-1426-100 26-conductor
- 08-1434-100 34-conductor
- 08-1440-100 40-conductor
- 08-1450-100 50-conductor

Grey jacket 28 AWG stranded .050" ribbon cable. Available in 100' spools only. Rated 300V 105 degrees C. UL and CSA listed.



Mode Electronics is proud to be ISO 9003 Certified.

