


TERMINAL BLOCKS

These 12 position flexible terminal blocks can be cut to length.




3 Amp
58-301-0
58-301-2




Bulk
Package




6 Amp
58-302-0
58-302-2



Bulk
Package

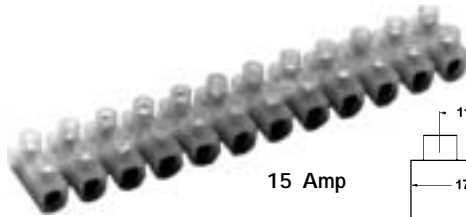

15 Amp
58-303-0
58-303-1




Bulk
Package

These flexible 12-position terminal blocks with wire protectors are made of Nylon 66, UL94V2 and are approved by most agencies including CSA, UL, VDE, OVE.



Current: UL
CSA
Wire: UL
CSA
58-308-0
58-308-1




20 Amps/600V
10 Amps/400V
12-22 AWG
18-20AWG



Bulk
Pkg



Current: UL
CSA
Wire: UL
CSA
58-312-0
58-312-1



30 Amps/600V
20 Amps/400V
10-22 AWG
14-18AWG




Bulk
Pkg

FANS

These fans are offered with a **3 year warranty** covering defects in materials and workmanship. We stock only sleeve bearing types on the manufacturers recommendation. These sleeve bearing fans have confirmed life expectancies of up to 50,000 hours even at high ambient temperatures. Ball bearing fans have a slightly longer life but their noise levels begin to increase in a very short time. A sleeve bearing fan does not suffer from this problem. The DC fans have an innovative (patented) motor construction that features a single coil. This design increases reliability and the smaller diameter of the motor allows increased air flow. Please note that voltages shown have a tolerance of +/- 15%. Exceeding this tolerance will damage the motor.

59-100-0 115VAC 120 x 120 x 38mm

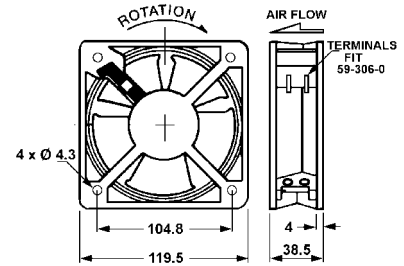


3 YEAR WARRANTY



Bearing:
Load:
Speed:
Air flow:
Noise:

Sleeve type
.18 Amps (18 watts)
2900 RPM
105 CFM
48 dbA


59-224-0 12VDC 25 x 25 x 10mm

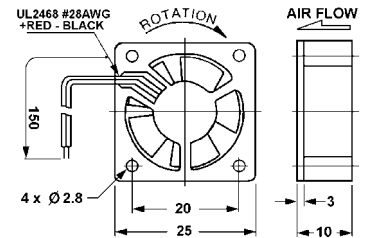

3 YEAR WARRANTY
Bearing:
Load:
Speed:
Air flow:
Noise:

Sleeve type
.095 A (1.1 watts)
10,000 RPM
1.7 CFM
26.5 dbA

59-244-0 12VDC 40 x 40 x 20mm

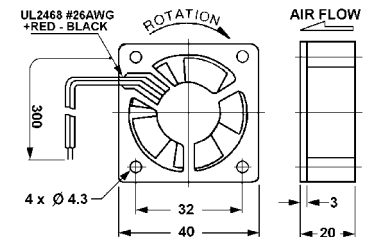

3 YEAR WARRANTY
Bearing:
Load:
Speed:
Air flow:
Noise:

Sleeve type
.05 A (.6 watts)
4500 RPM
5.2 CFM
22.8 dbA


MORE FANS ON NEXT PAGE

The fans shown in this catalog are our most popular types. If you require a different size or voltage, please contact us or your local Mode distributor for price and availability.

Mode Electronics is proud to be ISO 9003 Certified.




59-264-0 12VDC 60 x 60 x 25mm

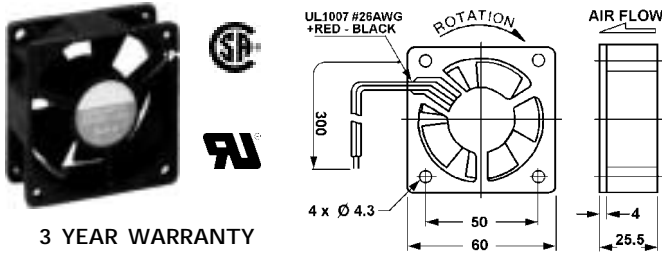

3 YEAR WARRANTY

Bearing: Sleeve type
 Load: .16 A (1.9 watts)
 Speed: 3800 RPM
 Air flow: 17.6 CFM
 Noise: 31 dbA


59-284-0 12VDC 80 x 80 x 25mm

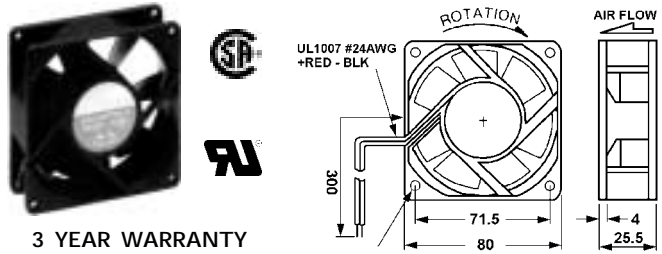

3 YEAR WARRANTY

Bearing: Sleeve type
 Load: .12 A (1.4 watts)
 Speed: 2200 RPM
 Air flow: 26.5 CFM
 Noise: 24.5 dbA


59-294-0 12VDC 92 x 92 x 25mm

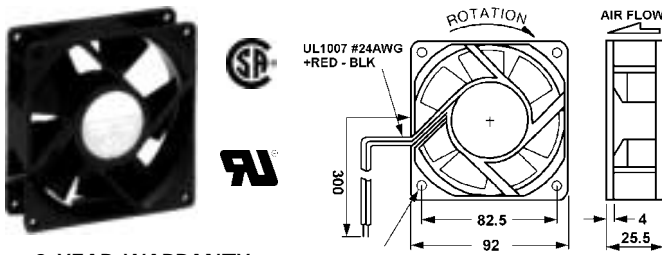

3 YEAR WARRANTY

Bearing: Sleeve type
 Load: .16 A (2.0 watts)
 Speed: 2700 RPM
 Air flow: 44 CFM
 Noise: 27 dbA

FAN ACCESSORIES




Nickel plated finger guards
 59-310-0 120mm
 59-314-0 40mm
 59-316-0 60mm
 59-318-0 80mm
 59-319-0 92mm



600mm power cord for 59-100-0.
 59-306-0 Bulk

AUDIO TRANSFORMERS




Primary: 500Ω center-tapped
60-281-0
 Secondary: 8Ω Bulk

Primary: 1.2KΩ center-tapped
60-282-0
 Secondary: 8Ω Bulk


Use -1 for Display Package

600Ω : 600Ω TRANSFORMER



Primary: 600Ω
 Secondary: 600Ω
 Freq. response: 300Hz - 3500Hz
 Max. current: 160mA
60-606-0 Bulk
60-606-1 Display Package
 Center pin on primary side is an electrostatic shield.

POWER TRANSFORMER

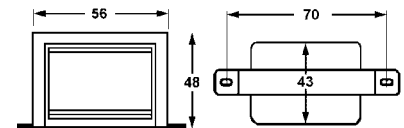

Input Voltage: 120VAC 60Hz
 Output: 12.6VAC @ 1A
 Centre tap: 6.3VAC @ .5A
60-912-0 Bulk


AUDIO L PADS



8 ohm 15 watt balanced impedance audio level control.

61-111-0 Mono Bulk
61-112-0 Stereo Bulk

Use -1 for Display Package



Visit our Web Site at
<http://www.mode-elec.com>

Mode Electronics is proud to be ISO 9003 Certified.

